

NITROGEN-PAC M SERIES

NITROGEN GENERATOR MODULE MODEL NGM-S

Description



The **UNITED Fire Systems** Model NGM-S is the module at the heart of a smaller capacity **NITROGEN-PAC™** modular sprinkler corrosion inhibiting system. The module contains the membrane that separates nitrogen from compressed air. Also included are coalescing and particulate filters which prolong the life of the membrane, and valves for operation of the module.

Technical Data

- Dimensions = 42" H x 24" W x 8.5" D (exclusive of mounting tabs)
- Nitrogen Generator Inlet Pressure = 140 PSIG
- Nitrogen Outlet Purity = 98%
- Module Contains:
 - Nitrogen Separator Membrane
 - High-Capacity Particulate Filter
 - High-Capacity Coalescing Filter
 - Inlet Pressure Gauge
 - Outlet Pressure Gauge
 - Initial Air Fill Bypass Valves
- Enclosure:
 - Constructed of 14 gage steel
 - NEMA / EEMAC 12-style construction
 - Seams continuously welded and ground smooth
 - Powder coated red inside and out
 - Tabs for enclosure mounting welded to top and bottom
 - Door attached with lift-off pins for easy removal
 - Door supplied with key lock latch

Ordering Information

- Model NGM-S

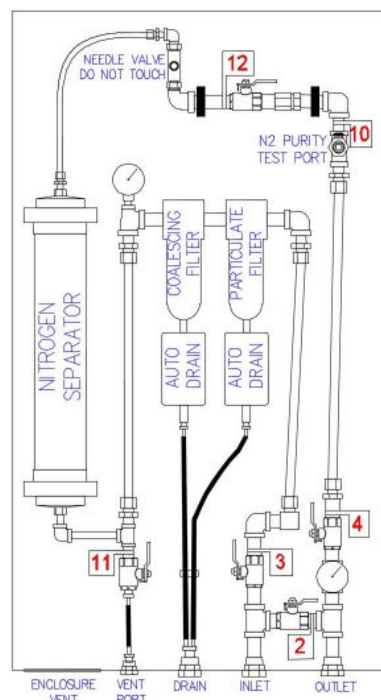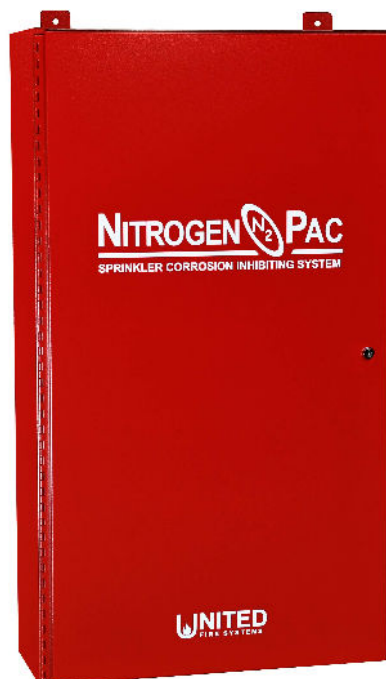

UNITED Fire Systems

Division of United Fire Protection Corporation

1 MARK ROAD

KENILWORTH, NJ 07033 USA

PHONE: 908-688-0300 FAX: 908-688-0218

unitedfiresystems.com

This literature is provided for informational purposes only. UNITED Fire Systems assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as intended.